


RPS – FX M1:

Flex Penstock 4-sided sealed, self-contained with non-rising Spindle

- *) Option Pedestal Floor Mounted
Required Hole for Spindle in Structure
Ø 80mm



Invert Frame:

- Wall mounted (W)
In Rebate (R)
Floor mounted (F)

W: Water Head

- ON-Seating
ON- and OFF-Seating


Caution: increased total width for OFF-Seating Water Heads

Design Water Head in (mm) WS: _____

Operating Water Head in (mm) WS: _____

Material: SS304 SS 316

Pedestal Wall Mounted *)

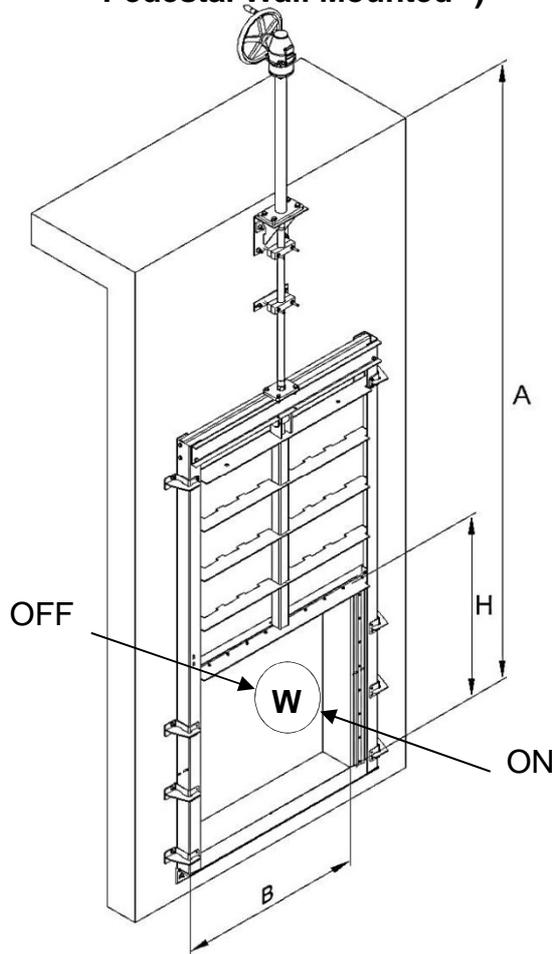


Operation Type



- Handwheel



- Handwheel with Bevel Gearbox




- Cap Top with Guide Bracket

General Sketch

(with wall mounted (W) invert frame)

- without control (Auma-Norm)
 with control AM (AUMATIC)
 with control AC (AUMA MATIC)

- Electric Actuator**



	Dimensions:
Customer:	A: _____(mm)
Date:	BxH: _____(mm)
	Quantity: _____