
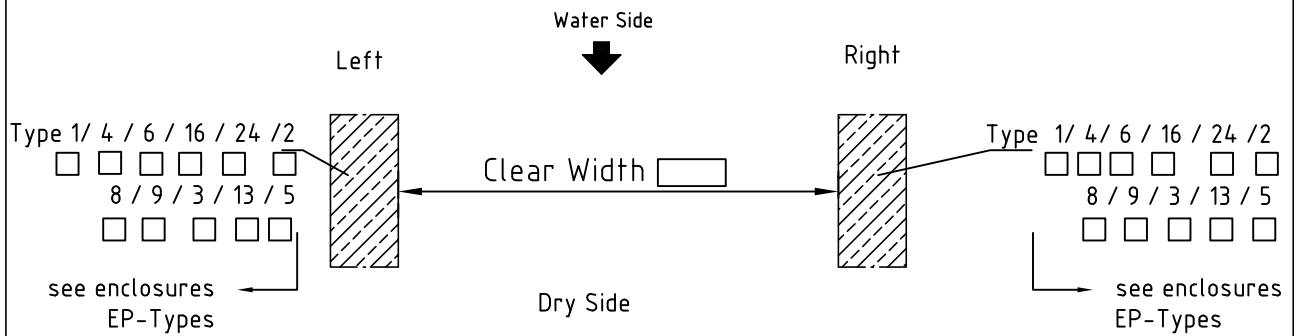


Dam Beam / Log Type :  
 Number :  Pieces

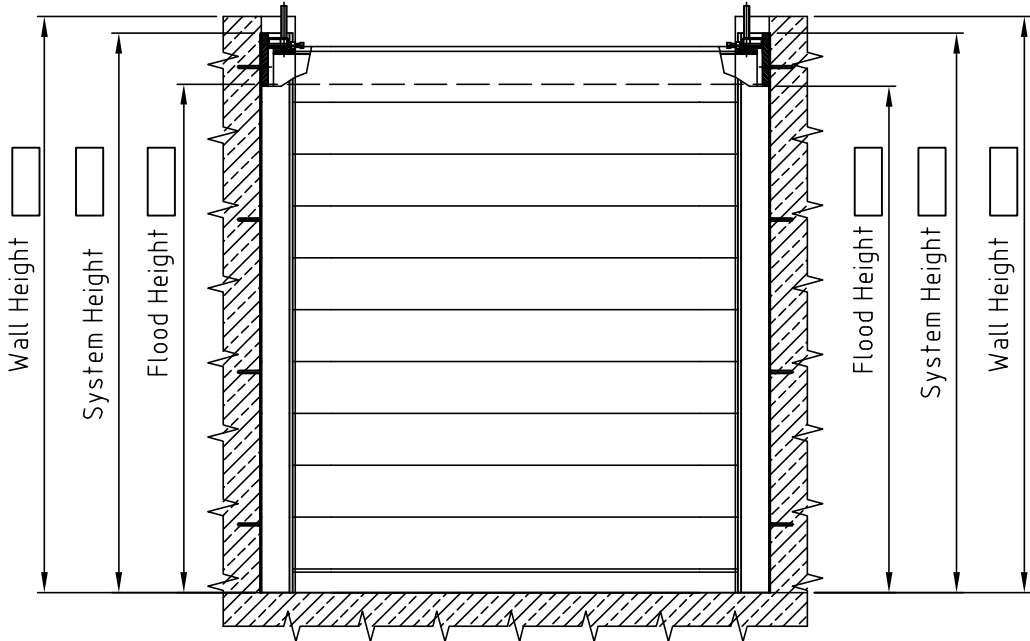

View from Dry Side specifies Left/Right

Mounting Situation for: Concrete  Full Brick  Perforated Brick  Cover

<b>Mounting Tolerances :</b> Frame Assembly - in Axis +/- 3mm - vertically +/- 3mm - Total max. 6mm Unevenness Invert Section - max. 15mm	<b>IBS</b> IBS GmbH Gemeindewald 4-6 D-86672 Thierhaupten Tel: +49-8271/8176-0 Fax:-76 E-Mail: water@ibs-technik.de	Principle Drawing HWS-Barrier (one field) P.Nr./ Pos.: Engineer : Approval Date: Signature:
---	--	---